

# TSW212 TELTONIKA Industrial Managed Switch



**Kode** : TSW212  
**Brand** : Teltonika  
**Jenis** : Switch Managed  
**Harga** : Rp 2.086.000,00


TSW212 is an L2 managed Ethernet switch with additional L3 features, like DHCPv6 client support and static IPv6 routing. This switch supports protocols, including EtherNet/IP, PROFINET, and MRP, and has 8 Gigabit Ethernet ports and 2 SFP ports to ensure robust long-range fibre optic communication.

Penawaran Harga Spesial

08112039555

## Features :

- L2 with additional L3 features for advanced management capabilities
- Supports PROFINET for automated data processing alongside other protocols, like EtherNet/IP and MRP
- 8 x Gigabit Ethernet ports and 2 x SFP ports for fibre optic communication
- Teltonika Networks OS for switches, intuitively designed for infinite configurations

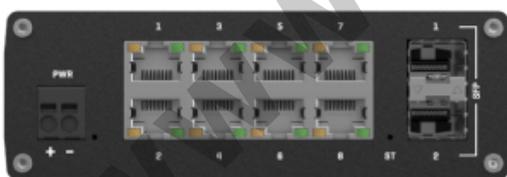

## Specification

<b>Model</b>	TSW212
<b>ETHERNET</b>	
<b>LAN</b>	Multi-layer managed 8 x ETH ports, 10/100/1000 Mbps supports auto MDI/MDIX crossover

<b>Fiber</b>	2 x SFP ports
<b>IEEE 802.3 series standards</b>	802.3i, 802.3u, 802.3ab, 802.3x, 802.3z
<b>SERVICES</b>	
<b>EtherNet/IP</b>	Yes
<b>PROFINET (class B)</b>	Yes
<b>SNMP V2, V3</b>	Yes
<b>LLDP</b>	Yes
<b>Network Management</b>	802.1p class of service, 802.1x port-based network access control, 802.1Q VLAN
<b>PERFORMANCE SPECIFICATIONS</b>	
<b>Bandwidth (Non-blocking)</b>	20 Gbps
<b>Forwarding rate</b>	14.88 Mpps
<b>Packer buffer</b>	512 KB
<b>MAC address table size</b>	8K entries
<b>Jumbo frame support</b>	10000 bytes
<b>POWER</b>	
<b>Connector</b>	2-pin industrial DC power socket
<b>Input voltage range</b>	7 - 57 VDC
<b>Power consumption</b>	Idle: < 2.5 W / Max: 6 W
<b>PHYSICAL INTERFACES</b>	
<b>Ethernet</b>	8 x RJ45 ports, 10/100/1000 Mbps
<b>Fiber</b>	2 x SFP ports
<b>Status LEDs</b>	1 x Power LED, 1 x Aux LED, 16 x ETH status LEDs, 2 x SFP status LEDs
<b>Power</b>	1 x 2-pin industrial DC power socket
<b>Reset</b>	Software reset button
<b>Other</b>	1 x Grounding screw

PHYSICAL SPECIFICATION	
Casing material	Anodized aluminum housing and panels
Dimensions (W x H x D)	132 x 44.2 x 122.2 mm
Mounting options	Integrated DIN rail bracket, wall mount, flat surface (additional kit needed)
OPERATING ENVIRONMENT	
Operating temperature	-40 °C to 75 °C
Operating humidity	10% to 90% non-condensing
Ingress Protection Rating	IP30

Standard Package Contains :

- TSW212
- QSG (Quick Start Guide)
- Packaging box

[Download Datasheet](#)

\* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/1224/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email [sales@citraweb.com](mailto:sales@citraweb.com)