

# Pro 48 PoE UNIFI UBIQUITI 48-Port POE++ Switch with 4-Port SFP+ Uplink

**Kode** : USW-PRO-48-POE

**Brand** : Ubiquiti

**Jenis** : Switch Managed POE

**Harga** : Rp 18.000.000,00




USW-PRO-48-POE UniFi 48-port GbE Layer 3 switch with 40-Port GbE PoE+, 8-Port GbE PoE++ and 4-Port SFP+ 10G.

**Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.**

Penawaran Harga Spesial

 **08112039555**

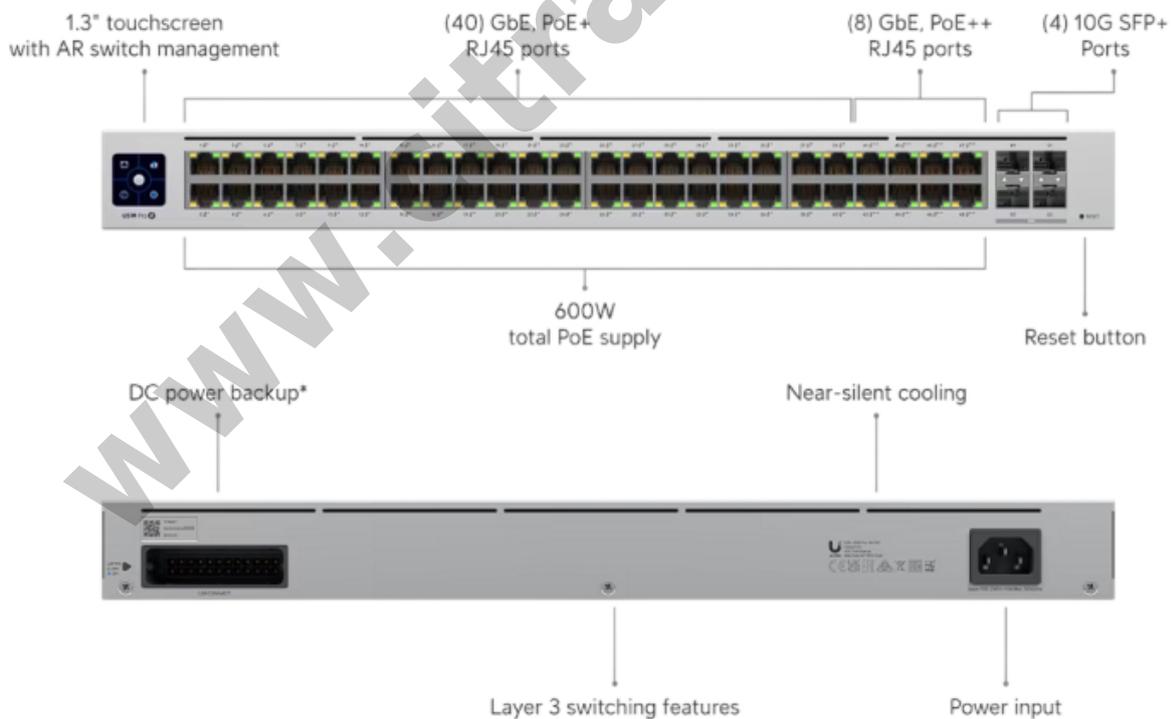

## Specification

<b>Model</b>	USW-PRO-48-POE
--------------	----------------

<b>Ports</b>	1 GbE RJ45 : 48 (40 PoE+; 8 PoE++) 10G SFP+ : 4
<b>Total PoE Availability</b>	600W
<b>Max. PoE Wattage per Port by PSE</b>	PoE : 15.4W PoE+ : 32W PoE++ : 64W
<b>Layer Type</b>	Layer 3
<b>Switching capacity</b>	176 Gbps
<b>Total Non-Blocking Throughput</b>	88 Gbps
<b>Forwarding rate</b>	131 Mpps
<b>Supported VLANs</b>	1000
<b>MAC address table</b>	16000
<b>L3 Table Size</b>	ARP Entries : 4000 IPv4 Routes : 1000
<b>Packet Buffer Size</b>	4 MB
<b>Dimensions (W x D x H)</b>	442 x 400 x 44 mm
<b>Max. Power Consumption</b>	60W (Excluding PoE Output) 660W (Including PoE Output)
<b>Power Method</b>	(1) Universal input, 100—240V AC, 50/60 Hz (1) USP RPS DC input
<b>Power Input Method</b>	AC input
<b>Power Supply</b>	AC/DC, internal, 660W
<b>Supported Voltage Range</b>	100—240V AC
<b>Management</b>	Ethernet AR
<b>Heat Dissipation (Excluding PoE Output)</b>	204.72 BTU/hr
<b>Enclosure Material</b>	SGCC steel
<b>LCM Display</b>	1.3" touchscreen
<b>Ambient Operating Temperature</b>	-5 to 40° C (23 to 104° F)
<b>Ambient Operating Humidity</b>	10 to 90% noncondensing
<b>Certifications</b>	CE, FCC, IC

[Download Datasheet](#)

\* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

**URL :** <https://www.citraweb.com/produk/1346/>

**Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email [sales@citraweb.com](mailto:sales@citraweb.com)**

[www.citraweb.com](http://www.citraweb.com)