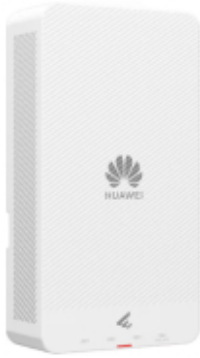


eKitEngine AP266 HUAWEI AX3000 Dual-Band Wi-Fi 6 Wall Plate Access Point

**Kode** : AP266**Brand** : Huawei**Jenis** : Wireless Indoor**Harga** : Rp 2.043.000,00

HUAWEI eKitEngine AP266 adalah access Point indoor slim wall plate berteknologi Wi-Fi 6 (802.11ax) yang beroperasi simultan di frekuensi 2.4 GHz (2x2) dan 5 GHz (2x2) dengan kecepatan data hingga 2,975 Gbps. Dilengkapi 1 port GE *uplink* serta 4 port GE *downlink* (termasuk 1 port PoE OUT),

***Belum termasuk adaptor dan poe injector**


***Spesifikasi perangkat dijual bisa berbeda dengan yang ditampilkan karena menyesuaikan dengan regulasi di Indonesia.**

Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.

Penawaran Harga Spesial

 **08112039555**

- Wall plate AP
- Wi-Fi 6
- 2.975 Gbps device rate
- Dual-radio
- 64 access users recommended
- Max. 128 access users
- 23 dBm transmit power
- 4 x GE electrical ports
- PoE
- Smart antenna
- leader AP
- 20 m optimal coverage range

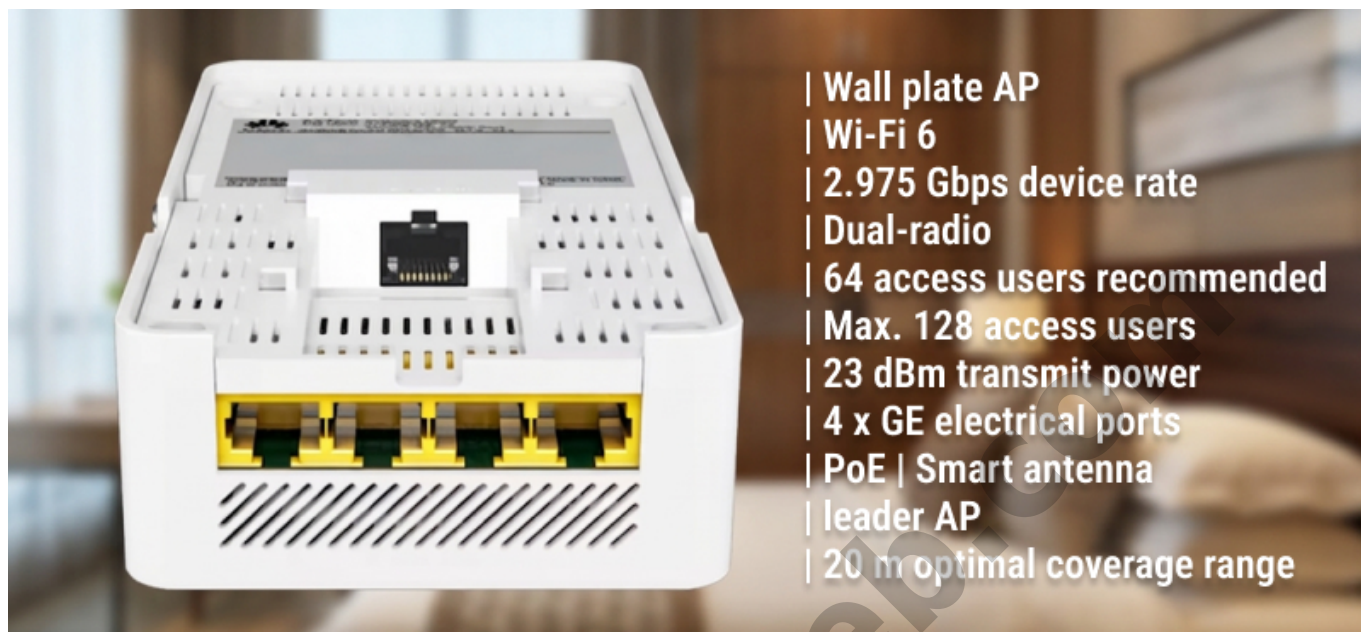

- | Wall plate AP
- | Wi-Fi 6
- | 2.975 Gbps device rate
- | Dual-radio
- | 64 access users recommended
- | Max. 128 access users
- | 23 dBm transmit power
- | 4 x GE electrical ports
- | PoE | Smart antenna
- | leader AP
- | 20 m optimal coverage range

Spesifikasi

Model	AP266
Wi-Fi standard	2.4 GHz: 802.11b/g/n/ax 5 GHz: 802.11a/n/ac/ac Wave 2/ax
Optimal Signal Distance (m)	20
Max Number of Access Users	128
Recommended Number of Access Users	64
Device Rate	2.975 Gbps
Power supply mode	PoE
Service port surge protection	PoE ports: Differential mode (48 V-RTN): 0.5 kV (1.2/50 us, 42 ohms), criterion B Common mode (8 wires to ground): 4 kV (1.2/50 us, 42 ohms), criterion B Non-PoE ports: Common mode (8 wires to ground): 4 kV (1.2/50 us, 42 ohms), criterion B
Maximum PoE output power [W]	15 W
Maximum number of physical ports on the entire device	5x GE (RJ45) 10M/100M/1000M auto-sensing
Radio number	2
Maximum channel bandwidth [MHz]	Radio 0 (2.4 GHz): 40 MHz Radio 1 (5 GHz): 160 MHz
Maximum transmit power	2.4G: 20 dBm/chain 23 dBm (combined power) 5G: 20 dBm/chain 23 dBm (combined power)

MIMO spatial streams	Radio 0 (2.4 GHz): 2x2 Radio 1 (5 GHz): 2x2
Maximum power consumption [W]	9.4 W (excluding PoE out)
Input voltage range [V]	PoE: 802.3at/af
Dimensions without packaging (H x W x D) [mm(in.)]	160 mm x 86 mm x 38 mm (6.30 in. x 3.39 in. x 1.50 in.)
Long-term operating temperature [°C(°F)]	0°C to 40°C (32°F to 104°F) (From 1800 m to 5000 m [5905.51 ft. to 16404.20 ft.], the maximum temperature of the device decreases by 1°C [1.8°F] for every 300 m [984.25 ft.] increase in altitude.)
Long-term operating relative humidity [RH]	5% RH to 95% RH, non-condensing
Radio interface	Built-in smart antennas
Antenna gain	2.4G: 4 dBi/chain (peak value) 2 dBi (combined gain) 5G: 4 dBi/chain (peak value) 1 dBi (combined gain)
Operating frequency band	2.4GHz,5GHz

[Download Datasheet](#)

* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/1544/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com