

# eKitEngine AR180 HUAWEI Dual Band Wi-Fi 7 Router Wireless

**Kode** : AR180**Brand** : Huawei**Jenis** : Router Wireless**Harga** : Rp 1.773.000,00


**HUAWEI eKitEngine AR180 Dual Band Wi-Fi 7 Router Wireless** adalah Enterprise-Grade Wireless Router Dual Band Wi-Fi 7 dengan 1 port 2.5G WAN dan 4 port gigabit LAN (3 port LAN/WAN). Perangkat ini support Mesh up to 8 perangkat, 8 IPSec Tunnel.

**\*Spesifikasi perangkat dijual bisa berbeda dengan yang ditampilkan karena menyesuaikan dengan regulasi di Indonesia.**

**Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.**

**Penawaran Harga Spesial** **08112039555**

- Enterprise-Grade Wireless Router
- Wi-Fi 7
- Number of IPSec Tunnels: 8
- Plastic, White
- Number of Managed APs: 8
- Number of Managed Devices: 9
- Number of connected terminals: 100
- Egress Bandwidth: 2Gbps
- VPN Forwarding Performance: 200Mbps
- 4 GE Electrical Ports + 1 2.5GE Electrical Port

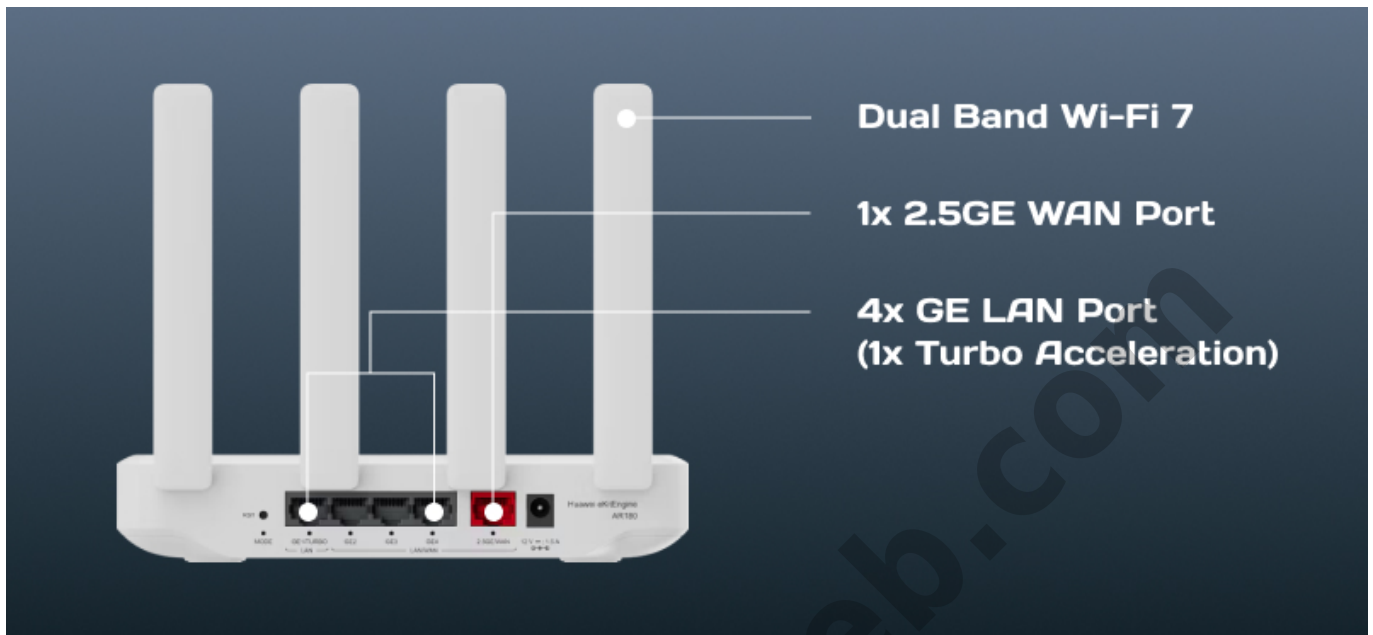

#### Spesifikasi

|                                                           |                                                                                                                                                                 |
|-----------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Model</b>                                              | AR180                                                                                                                                                           |
| <b>Installation type</b>                                  | Work bench, Against the wall                                                                                                                                    |
| <b>Dimensions without packaging (H x W x D) [mm(in.)]</b> | - Basic dimensions: 35 mm x 195 mm x 130 mm (1.38 in. x 7.68 in. x 5.12 in.)<br>- Maximum dimensions: 163 mm x 195 mm x 150 mm (6.42 in. x 7.68 in. x 5.91 in.) |
| <b>CPU</b>                                                | 1.3 GHz, dual-core                                                                                                                                              |
| <b>Typical power consumption [W]</b>                      | 7                                                                                                                                                               |
| <b>Maximum power consumption [W]</b>                      | 13                                                                                                                                                              |
| <b>Power supply mode</b>                                  | AC power adapter                                                                                                                                                |
| <b>Rated input voltage [V]</b>                            | 110 V AC-220 V AC; 50/60 Hz                                                                                                                                     |
| <b>Input voltage range [V]</b>                            | 90 V AC-264 V AC; 45 Hz-65 Hz                                                                                                                                   |
| <b>Maximum output power [W]</b>                           | 24 W                                                                                                                                                            |
| <b>Safety regulation certification</b>                    | IEC/EN/UL 62368-1 GB 4943.1 CSA C22.2 No. 62368-1 AS/NZS 62368-1                                                                                                |
| <b>EMC certification</b>                                  | EN 55032 EN 55035 EN 300386 EN 61000-3-2 EN 61000-3-3 EN 301 489-1 EN 301 489-17 ICES-003 AS/NZS CIPSR32 VCCI-CIPSR32 GB/T 9254.1 FCC CFR47 part 15             |

|                                                   |                                                                                                                                                                                                             |
|---------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Long-term operating temperature [°C(°F)]</b>   | 0°C to 40°C (32°F to 104°F) Note: When the altitude is 1800 m-5000 m (5906 ft.-16404.2 ft.), the highest operating temperature reduces by 1°C (1.8°F) every time the altitude increases by 220 m (722 ft.). |
| <b>Storage temperature [°C(°F)]</b>               | -40°C to +70°C (-40°F to +158°F)                                                                                                                                                                            |
| <b>Long-term operating relative humidity [RH]</b> | 5% RH to 95% RH, non-condensing                                                                                                                                                                             |
| <b>Long-term operating altitude [m(ft.)]</b>      | < 5000 m (16404.2 ft.)                                                                                                                                                                                      |
| <b>LAN ports</b>                                  | 4 x GE electrical interfaces                                                                                                                                                                                |
| <b>WAN ports</b>                                  | 1 x 2.5GE electrical port                                                                                                                                                                                   |
| <b>Environmental standards compliance</b>         | EN 300 019-2 IEC 60068-2                                                                                                                                                                                    |
| <b>Overtemperature alarm</b>                      | Supported                                                                                                                                                                                                   |
| <b>Certification</b>                              | EMC certification Safety certification Manufacturing certification                                                                                                                                          |

[Download Datasheet](#)

\* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

**URL :** <https://www.citraweb.com/produk/1552/>

**Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email [sales@citraweb.com](mailto:sales@citraweb.com)**