TP-LINK ES228GP OMADA 28-Port Gigabit Easy Managed Switch with 24-Port PoE+

Kode : ES228GP
Brand : TP-Link Omada
Jenis : Switch Managed POE
Harga : Rp 3.215.000,00

TP-LINK ES228GP OMADA merupakan switch layer 2 dengan casing 1U rackmount, 24 port Gigabit 802.3af/at PoE+ dengan max PoE budget 250 W (up to 30 W per port), 2 port Gigabit RJ45 dan 2 port SFP 1G.

Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.

Penawaran Harga Spesial
08112039555

- **26 port RJ45 10/100/1000Mbps (24 PoE+ yang sesuai dengan standar 802.3af/at)**
- **2 slot SFP Gigabit**
- **Anggaran daya 250W, dengan up to 30W untuk setiap port PoE**
- **Mudah Digunakan: Mendukung plug-and-play untuk konektivitas instan dan konfigurasi sederhana untuk fitur tambahan.**
- **Manajemen Cloud Terpusat melalui web atau Aplikasi Omada**
- **Pencegahan Loop Otomatis, VLAN, dan IGMP Snooping**
- **Casing logam yang tahan lama dan desain yang dapat dipasang di rak**

www.citraweb.com

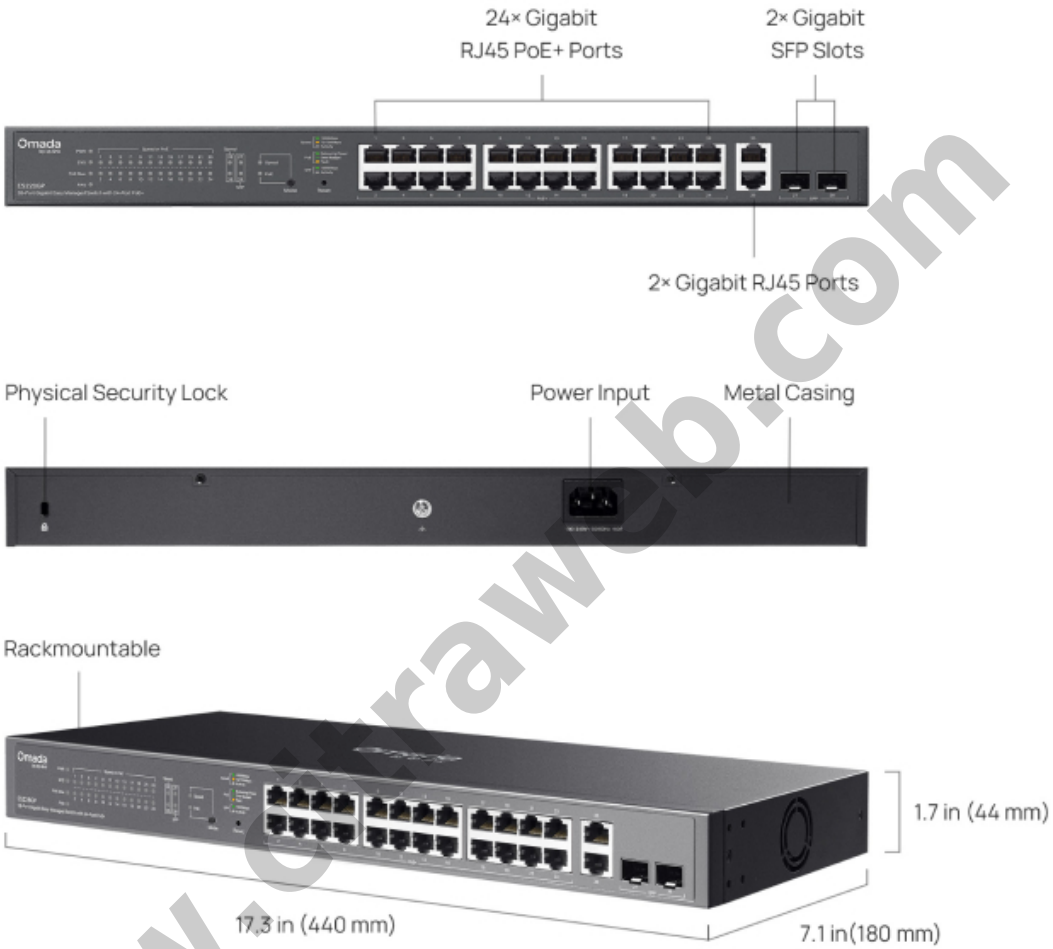

www.citraweb.com

Spesifikasi

Model	ES228GP
HARDWARE FEATURES	
Interface	• 24× 10/100/1000 Mbps PoE+ RJ45 Ports (802.3af/at-compliant PoE+) • 2× 10/100/1000 Mbps RJ45 Port • 2× Gigabit SFP Slots • Auto-Negotiation/Auto MDI/MDIX
Fan	1

Physical Security Lock	Yes
Power Supply	100-240 V AC~50/60 Hz
PoE Ports (RJ45)	• Standard: 802.3af PoE and 802.3at PoE+ compliant • PoE Ports: 24 ports • PoE Budget: 250W available for all PoE+ ports, 30W max per port • Fast PoE & Perpetual PoE • PoE Auto Recovery
Dimensions (W x D x H)	17.3 × 7.1 × 1.7 in (440 × 180 × 44 mm)
Surge Protection	±6 kV
Mounting	Rack Mountable
Max. Power Consumption	290.9 W (220 V/50 Hz) (with 250 W PD connected @ 25 °C) 301.5 W (110 V/60 Hz) (with 250 W PD connected @ 25 °C)
Max. Heat Dissipation	989.06 BTU/hr (220 V/50 Hz) (with 250 W PD connected @ 25 °C) 1025.10 BTU/hr (110 V/60 Hz) (with 250 W PD connected @ 25 °C)
Packet Buffer Memory	4 Mbit
Switching Capacity	56 Gbps
Packet Forwarding Rate	41.67 Mpps
MAC Address Table	8K
Jumbo Frame	15 KB
Transmission Method	Store and Forward
SOFTWARE FEATURES	
Quality of Service	• Port-based/802.1p/DSCP QoS • 8 Priority Queues • Priority Schedule Mode - WRR (Weighted Round Robin) • Queue Weight Config • Bandwidth Control - Port-Based Rating Limit • Storm Control - Multiple Control Modes (kbps/pps) - Broadcast/Multicast/Unknown-Unicast Control

www.citraweb.com

L2 Features	• Link Aggregation - Static Link Aggregation - Up to 4 aggregation groups and up to 6 ports per group • Port Isolation • Loopback Detection • Flow Control - 802.3x Flow Control • Mirroring - Port Mirroring - One-to-One - Many-to-One - Ingress/Egress/Both • Port Statistics - Port Mirror Status - Traffic Statistics • 802.1ab LLDP • IEEE 802.3az EEE
L2 Multicast	• IGMP Snooping - IGMP v1/v2/v3 Snooping - Fast Leave
VLAN	• 802.1Q Tag VLAN - Max 32 VLAN Groups - 4K VID
OTHERS	
Certification	CE, FCC
Package Content	• ES228GP • Power Cord • Mounting Brackets • Mounting Feet • Screws • Installation Guide
Environment	• Operating Temperature: -5–50C (23–122F) • Storage Temperature: -40–70C (-40–158F) • Operating Humidity: 10–90% RH non-condensing • Storage Humidity: 5–90% RH non-condensing

www.citraweb.com

Download Datasheet

** Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat*

URL : https://www.citraweb.com/produk/1602/

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com