TP-LINK ES210GP OMADA 10-Port Gigabit Easy Managed Switch with 8-Port PoE+

Kode : ES210GP
Brand : TP-Link Omada
Jenis : Switch Managed POE
Harga : Rp 1.224.000,00

TP-LINK ES210GP OMADA merupakan switch layer 2 dengan casing desktop/wallmount, 8 port Gigabit 802.3af/at PoE+ dengan max PoE budget 63 W (up to 30 W per port), 1 port Gigabit RJ45 dan 1 port Gigabit Combo RJ45/SFP.

Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.

Penawaran Harga Spesial
08112039555

- **9 port RJ45 10/100/1000Mbps (8 port PoE+ yang sesuai dengan standar 802.3af/at)**
- **1 port kombo Gigabit SFP/RJ45**
- **Konsumsi daya 63W, dengan daya hingga 30W untuk setiap port PoE**
- **Mudah Digunakan: Mendukung plug-and-play untuk konektivitas instan dan konfigurasi sederhana untuk fitur tambahan.**
- **Manajemen Cloud Terpusat melalui web atau aplikasi Omada**
- **Pencegahan Loop Otomatis, VLAN, dan IGMP Snooping**
- **Desain tanpa kipas untuk pengoperasian yang senyap**
- **Casing logam yang tahan lama dan desain pemasangan di meja/dinding.**

www.citraweb.com

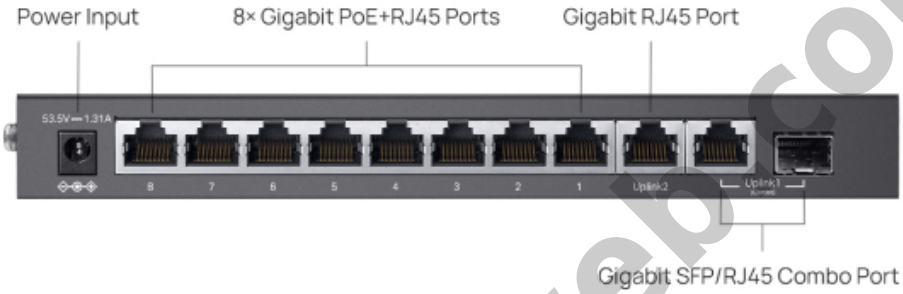

www.citraweb.com

Spesifikasi

Model	ES210GP
HARDWARE FEATURES	
Interface	• 8× 10/100/1000 Mbps PoE+ RJ45 Ports (802.3af/at-compliant PoE+) • 1× 10/100/1000 Mbps RJ45 Port • 1× Gigabit SFP/RJ45 Combo Port • Auto-Negotiation/Auto MDI/MDIX
Fan	Fanless

Physical Security Lock	Yes
Power Supply	AC/DC Adapter (Input: 100-240V AC; Output: 53.5V DC/1.31A)
PoE Ports (RJ45)	• Standard: 802.3af/at PoE+ compliant • PoE Ports: 8 ports • PoE Budget: 63W available for all PoE+ ports, 30W max per port • Fast PoE & Perpetual PoE • PoE Auto Recovery
Dimensions (W x D x H)	8.2×4.9×1.0 in (209×126×26 mm)
Surge Protection	±6 kV
Mounting	• Desktop • Wall Mount
Max. Power Consumption	74.1 W (220 V/50 Hz @ 25 °C) (with 63 W PD connected) 76.6 W (110 V/60 Hz @ 25 °C) (with 63 W PD connected)
Max. Heat Dissipation	252.01 BTU/hr (220 V/50 Hz @ 25 °C) (with 63 W PD connected) 260.41 BTU/hr (110 V/60 Hz @ 25 °C) (with 63 W PD connected)
Packet Buffer Memory	4 Mbit
Switching Capacity	20 Gbps
Packet Forwarding Rate	14.88 Mpps
MAC Address Table	8K
Jumbo Frame	15 KB
Transmission Method	Store and Forward
SOFTWARE FEATURES	
Quality of Service	• Port-based/802.1p/DSCP QoS • 8 Priority Queues • Priority Schedule Mode - WRR (Weighted Round Robin) • Queue Weight Config • Bandwidth Control - Port-Based Rating Limit • Storm Control - Multiple Control Modes (kbps/pps) - Broadcast/Multicast/Unknown-Unicast Control

www.citraweb.com

L2 Features	• Link Aggregation - Static Link Aggregation - Up to 4 aggregation groups and up to 6 ports per group • Port Isolation • Loopback Detection • Flow Control - 802.3x Flow Control • Mirroring - Port Mirroring - One-to-One - Many-to-One - Ingress/Egress/Both • Port Statistics - Port Mirror Status - Traffic Statistics • 802.1ab LLDP • IEEE 802.3az EEE
L2 Multicast	• IGMP Snooping - IGMP v1/v2/v3 Snooping - Fast Leave / Report Suppression
VLAN	• 802.1Q Tag VLAN - Max 32 VLAN Groups - 4K VID
OTHERS	
Certification	CE, FCC
Package Content	• ES210GP • Power Adapter • Power Cord • Mounting Feet • Installation Guide
Environment	• Operating Temperature: -5–40C (23–104F) • Storage Temperature: -40–70C (-40–158F) • Operating Humidity: 10–90% RH non-condensing • Storage Humidity: 5–90% RH non-condensing

www.citraweb.com

Download Datasheet

** Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat*

URL : https://www.citraweb.com/produk/1606/

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com