**CITRAWEB SOLUSI TEKNOLOGI**
www.citraweb.com
info@citraweb.com
sales@citraweb.com

# TP-LINK ES224G OMADA 24-Port Gigabit Easy Managed Switch



**Kode** : ES224G
**Brand** : TP-Link Omada
**Jenis** : Switch Managed
**Harga** : Rp 1.852.000,00


**TP-LINK ES224G OMADA** merupakan switch layer 2 dengan casing Desktop/Rackmount dilengkapi 24 port 10/10/1000 Mbps RJ45, casing metal dan fanless desain.

**Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.**

Penawaran Harga Spesial
08112039555

- **24 port RJ45 10/100/1000Mbps**
- **Mudah Digunakan: Mendukung plug-and-play untuk konektivitas instan dan konfigurasi sederhana untuk fitur tambahan**
- **Manajemen Cloud Terpusat melalui web atau aplikasi Omada**
- **VLAN, Isolasi Port, Pengujian Kabel, QoS untuk jaringan pengawasan yang andal**
- **Pencegahan Loop Otomatis dan Pengawasan IGMP**
- **Desain tanpa kipas untuk pengoperasian yang senyap**
- **Casing logam yang tahan lama dan desain pemasangan di meja/rak**

www.citraweb.com

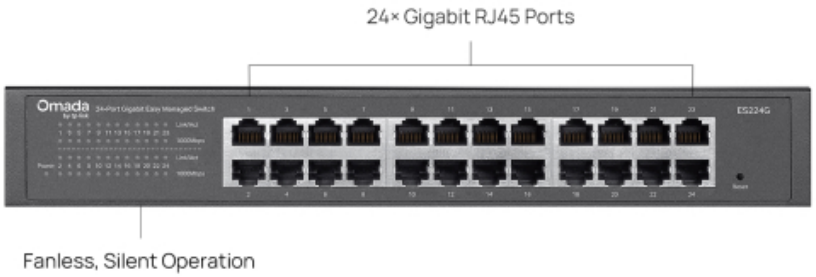








www.citraweb.com






**Spesifikasi**

| | |
|---|---|
| **Model** | ES224G |
| | |
| **HARDWARE FEATURES** | |
| **Interface** | • 24× 10/100/1000 Mbps RJ45 Ports<br>• Auto-Negotiation/Auto MDI/MDIX |
| **Fan** | Fanless |
| **Physical Security Lock** | Yes |
| **Power Supply** | 100-240 V~50/60 Hz |
| **Dimensions ( W x D x H )** | 11.6 × 5.5 × 1.7 in (294× 140 × 44 mm) |
| **Surge Protection** | ±6 kV |
| **Mounting** | • Desktop<br>• Rackmountable |
| **Max. Power Consumption** | 11.4 W (110V/60Hz) |
| **Max. Heat Dissipation** | 38.66 BTU/hr (110 V/60 Hz) |
| **Packet Buffer Memory** | 4 Mbit |
| **Switching Capacity** | 48 Gbps |

www.citraweb.com

**CITRAWEB SOLUSI TEKNOLOGI**
www.citraweb.com
info@citraweb.com
sales@citraweb.com

| | |
|---|---|
| **Packet Forwarding Rate** | 35.7 Mpps |
| **MAC Address Table** | 8K |
| **Jumbo Frame** | 15 KB |
| | |
| **SOFTWARE FEATURES** | |
| **Quality of Service** | • Port-based/802.1p/DSCP QoS<br>• 8 Priority Queues<br>• Priority Schedule Mode<br>- WRR (Weighted Round Robin)<br>• Queue Weight Config<br>• Bandwidth Control<br>- Port-Based Rating Limit<br>• Storm Control<br>- Multiple Control Modes (kbps/pps)<br>- Broadcast/Multicast/Unknown-Unicast Control |
| **L2 Features** | • Static Link Aggregation<br>• Loop Prevention / Loopback Detection<br>• Flow Control<br>- 802.3x Flow Control<br>• Mirroring<br>- Port Mirroring<br>- One-to-One<br>- Many-to-One<br>- Ingress/Egress/Both<br>• Port Statistics<br>- Port Mirror Status<br>- Traffic Statistics<br>• 802.1ab LLDP |
| **L2 Multicast** | • IGMP Snooping<br>- IGMP v1/v2/v3 Snooping<br>- Fast Leave |
| **VLAN** | • MTU VLAN<br>• Port-Based VLAN<br>• 802.1Q Tag VLAN<br>- Max 32 VLAN Groups<br>- 4K VID |
| **Transmission Method** | Store-And-Forward |
| | |
| **OTHERS** | |
| **Certification** | CE, FCC |

www.citraweb.com

| | |
|---|---|
| **Package Content** | • ES224G<br>• Power Cord<br>• Rubber Feet<br>• Mounting Brackets<br>• Screws<br>• Installation Guide |
| **Environment** | • Operating Temperature: -5–50C (23–122F)<br>• Storage Temperature: -40–70C (-40–158F)<br>• Operating Humidity: 10–90% RH non-condensing<br>• Storage Humidity: 5–90% RH non-condensing |

**Download Datasheet**

** Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat*

**URL :** https://www.citraweb.com/produk/1610/

**Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com**

www.citraweb.com