

MikroBits Ainos (RoS Level 4)

Kode : MBITSAI2-L4**Brand** : Discontinued**Jenis** : Discontinued**Harga** : Rp 13.935.000,00

Rp 15.935.000,00



Router ini berbasis processor Intel Multi Core 2nd Generation i3 dengan 1U rackmount. Memiliki 8 buah port gigabit yang terkoneksi langsung ke mainboard, memberikan kecepatan tinggi pada tiap portnya. Sudah termasuk MikroTik RouterOS level 4.

---- Attention -----

Karena perubahan Storage Management Pada routerOS MikroTik platform **x86** di versi **6.20**, maka kami sarankan untuk melepas terlebih dahulu **Hardisk SATA** sebelum melakukan upgrade versi ke versi 6.20 dan versi-versi selanjutnya.

Hardisk SATA dapat dipasang kembali setelah proses upgrade versi selesai.



Spesifikasi

- **CPU** : Multi Core x86-64 64 Bit, Intel Core i3 3.3 GHz Processor
- **Memory** : 4 x DDR3 1333 DIMM Slots, 1 x 2048MB Industrial Grade RAM (2GB RAM) installed on the base Model
- **Boot loader** : Phoenix BIOS
- **Data storage** : 2x SATA, 1x CF Slots with True IDE IBM MicroDrive Support
- **Compact Flash** : 1 GB Industrial Grade Compact Flash for RouterOS
- **HDD** : 250GB SATA 2.5" HDD
- **Ethernet** : 8 x 10/100/1000 Mbit/s Intel Pro 1000 Gigabit Ethernet ports supporting Auto-MDI/X through PCI-E single Lanes
- **PCI Slots** : 1x PCIe 8x Slot
- **Serial port** : 1x DB9 RS232C asynchronous serial ports
- **LEDs / LCDs** : 1x back lit 2character x16 character LCD Display, Power and HDD LED
- **Speaker** : Mini PC - Speaker
- **Power** : IEC C13 Power Cord, input power: 100VAC-250VAC 50Hz- 60Hz (International PSU)
- **Fan** : 3x Redundant CPU/Power Supply /Chassis Fans,
- **Dimensions** : 31cm x 45 cm x 4.4 cm
- **Temperature** : Operational: 0°C to 45°C
- **Humidity** : Operational: up to 95% relative humidity (non-condensing)
- **Power Supply** : 270W ATX PSU
- **Operating System** : MikroTik Router OS



System

Uptime:	6d 22:46:47
Free Memory:	1637.5 MiB
Total Memory:	1900.1 MiB
Model:	
CPU:	Intel(R)
CPU Count:	2
CPU Frequency:	2133 MHz
CPU Load:	13 %
Free HDD Space:	1867.3 MB
Total HDD Size:	1922.7 MB

BGP Peer

Remote ID:	
Local Address:	
Uptime:	21:06:36
Prefix Count:	324336
Updates Sent:	11
Updates Received:	608 991
Withdrawn Sent:	
Withdrawn Received:	32 907
Remote Hold Time:	90 s


Interface

Tx/Rx Rate:	75.8 Mbps	/	16.2 Mbps
Tx/Rx Packet Rate:	9 775 p/s	/	7 875 p/s
Tx/Rx Bytes:	4144.6 GiB	/	755.4 GiB
Tx/Rx Packets:	4452 138 593	/	3834 317 712
Tx/Rx Drops:	0	/	48
Tx/Rx Errors:	0	/	0

Screen capture pada kondisi real, mampu melewati lebih dari 9 ribu pps dan menerima full route BGP (300K prefix) dengan CPU load 15%

Test Type	Aggregate Result
TCP Routed	3.9 Gb/sec
Contract On	2.000K Packet/sec

Bypass Function - Aktif secara otomatis jika terjadi fail terhadap system (OS fail / Power fail).

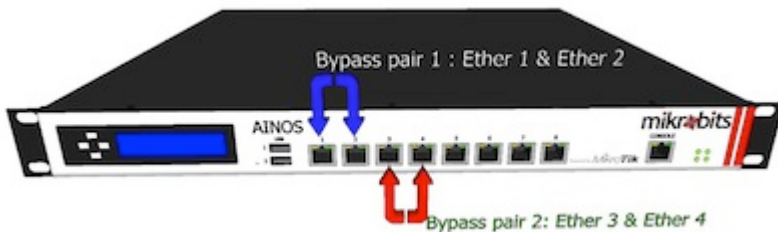

* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/326/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com

www.citraweb.com