

Line Interactive UPS, 1500VA/900W



Kode : Plus5L-U1500G

Kategori : APlus UPS System

Harga : Rp 1.195.000,00

Plus5L-U1500G adalah produk dari APlus UPS System dengan rating 1500VA/900Watt dan memiliki desain "Easy Battery Replacement". Desain ini memungkinkan pengguna untuk mudah melakukan maintenance atau mengganti battery jika sudah lemah.

***Penjualan produk ini tidak termasuk battery**

Features :

- Controlled by a technologically advanced microprocessor guaranteeing high reliability
- Equipped with 2-steps boost & 1-step buck AVR to stabilize output voltage
- USB port and monitor software is designed to manage UPS status via PC (Optional)
- Built-in DC start function enables UPS to be started without AC power supplied
- Constant current, constant voltage battery charger (CCCV Battery Charger)
- UPS will charge itself even though power switch is off (Off mode charging)
- UPS will shut down upon battery low ; UPS will restart automatically upon AC recovery (Auto-restart)
- Over / under voltage protection (UPS will go to battery mode)
- Easy replacement battery design
- Lightning / surge protection 175 joules

Battery Type :

- VRLA 12V/9AH or VRLA 12V/7.2AH
- 2 pcs
- **Battery dimension 151 x 65 x 100 mm**


Backup Time (estimated) :

LOAD	9AH Battery	7.2AH Battery
900 Watt	10 Minutes	8 Minutes
700 Watt	12 Minutes	10 Minutes

500 Watt	18 Minutes	14 Minutes
----------	------------	------------

Easy Battery Replacement and Installation :

Intelligent Battery Door Design:

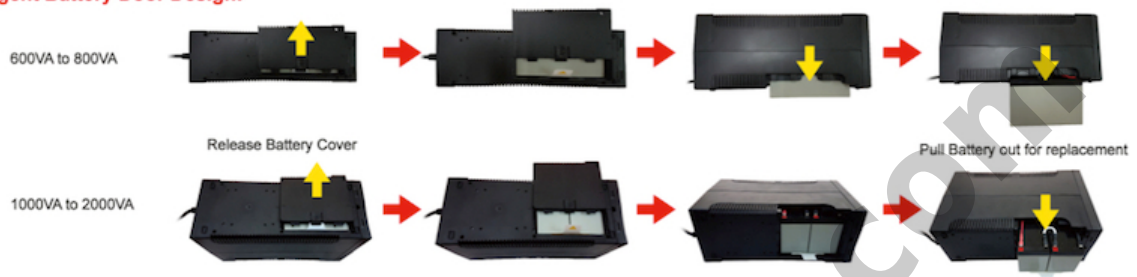

Manual :

[UPS-Aplus-Plus5L.pdf](#)

Specification :

INPUT	
Voltage	110/115/120Vac or 220V/230/240Vac
Voltage Range	-30% +25%
Frequency	50Hz or 60Hz (Auto-Sensing)
OUTPUT	
Voltage Regulation	AC Mode / Battery normal : 110/115/120Vac or 220/230/240Vac +/- 10%
Frequency	AC mode: 47-53Hz for 50Hz or 57-63Hz for 60Hz; Battery mode: 50Hz or 60Hz +/- 1Hz
Waveform	Simulated Sinewave
Transfer Time	< 6ms(Typical)
Outlet: IEC-320 C13*2pcs + Schuko*4pcs	6pcs with backup/AVR/Surge protected
BATTERY	
Voltage	24VDC
Type	12V/9AH*2pcs
Recharge Time	5 hours to 90% after complete discharge
Safety Protection	Over Charge & Over Discharge Protection
Advance Battery Management	Yes
DISPLAY	
LED Status Indicators	Input voltage, Output voltage, Load level, Battery level, Fault, Battery fail, Overload, AC normal
AUDIBLE ALARM	

Battery Mode	Two short tones every 8 seconds
Low Battery	Four short tones every seconds
Overload	Beeping continuously
Fault	Beeping continuously
MANAGEMENT	
USB Communication Port	Included, Software support Windows 95/98/NT/2000/ME/XP/2003/Vista/7/8/10
ENVIRONMENT	
Operating Temperature	0° C - 40° C (32° F ~ 104° F)
Humidity	0-95% (Non-condensing)
Acoustic Noise	<40 db at 1M
PHYSICAL	
Dimension (W*D*H)	343*135*208mm

* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/810/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com