

## TwistPort Adaptor PAF



**Kode** : TPA-PAF

**Kategori** : RF elements

**Harga** : Rp 775.000,00  
Rp 915.000,00

This TP-A is also compatible with the LTU™ Rocket and AF-5XHD airFiber® and with newest Gen 2 of Rocket Prism 5AC radios.

Complete List of compatible radios includes: UBNT™ LTU™ Rocket, airFiber® 5X, airFiber® 5XHD, Rocket Prism 5AC and Rocket Prism 5AC Gen2.

### What Is TwistPort™ Adaptor

TwistPort Adaptor adapts 3rd party radios to RF elements® proprietary TwistPort™ waveguide connector. Integration of the radio is smooth and requires no tools. Making 3rd party radios compatible with TwistPort™ allows for using the radio with any TwistPort™ antenna ever made and enable superior performance, noise immunity and network scalability.

[www.citraweb.com](http://www.citraweb.com)

[www.citraweb.com](http://www.citraweb.com)


**For LTUTM Rocket, airFiber® 5X and Rocket® Prism 5AC**

This TP-A is also compatible with the LTUTM Rocket and AF-5XHD airFiber® and with newest Gen 2 of Rocket Prism 5AC radios. Complete List of compatible radios includes: UBNTTM LTUTM Rocket, airFiber® 5X, airFiber® 5XHD, Rocket Prism 5AC and Rocket Prism 5AC Gen2.



**For LTUTM Rocket, airFiber® 5X and Rocket® Prism 5AC**

The migration path from Rocket Prism 5AC to airFiber® 5X or LTUTM Rocket platform is smooth and effective, as no additional investment on TP-A is required.

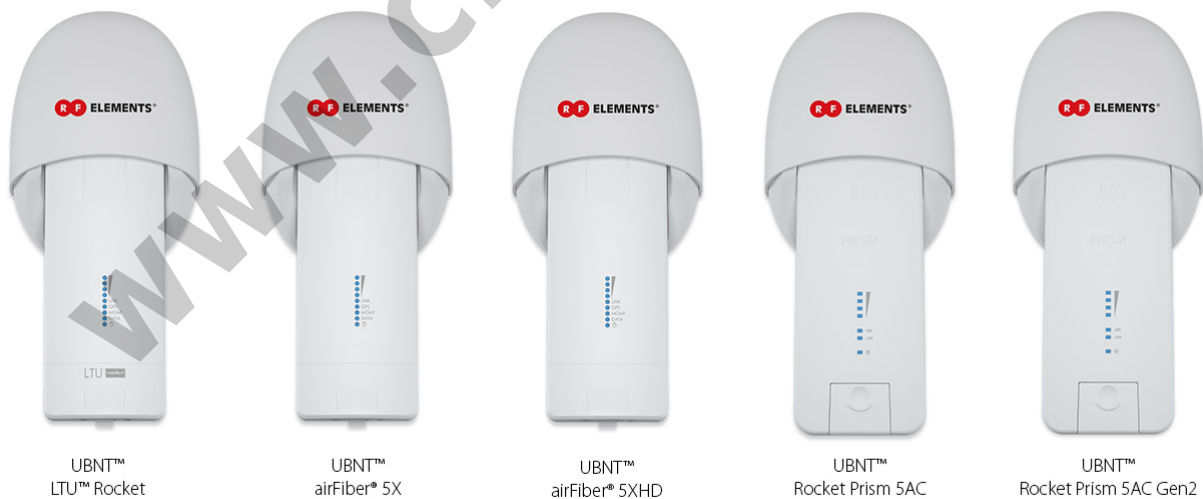


**GPS Antenna Integration**

TP-A PAF contains well protected space for GPS antenna that comes with UBNT® radios. After integration, GPS antenna and antenna cable are covered and well protected. No more issues with antenna attachment or with troubleshooting damaged GPS antennas.

### Market Leading Performance

TwistPort™ Adaptors cover an ultra-wideband spectrum of 5180-6400 MHz and perform with superb efficiency with very well managed VSWR.

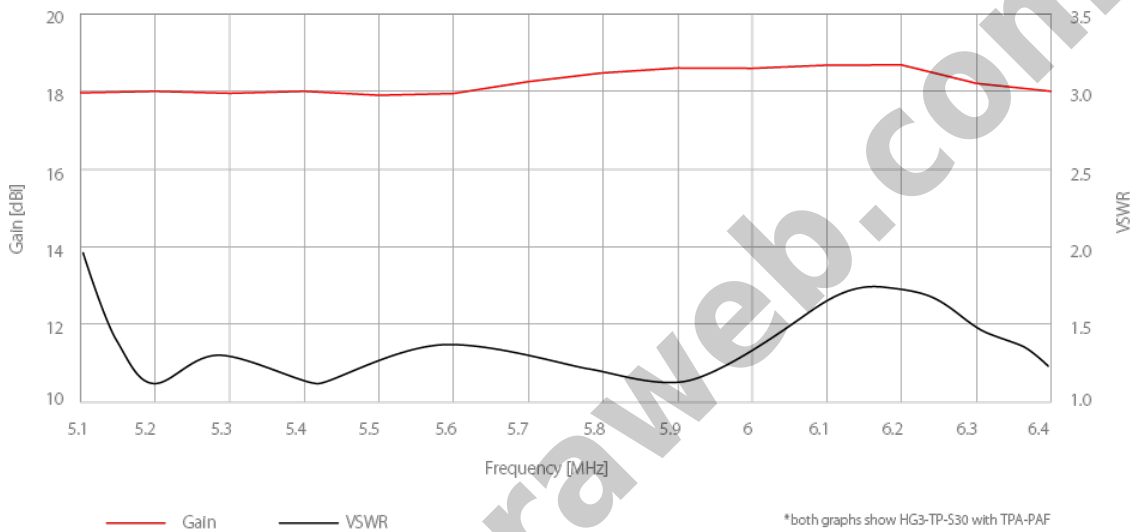


### Easy Installation

We are the Champions of Easy. Check out yourself:

Antenna Connection	TwistPort - Quick Locking Waveguide Port
Radio Connection	2x Slide-On RP-SMA and 1x SMA for GPS
Materials	Insert - Aluminium Alloy
	Adapter - UV stabilized and weather resistant ABS plastic
Flame Rating	UL 94 HB
Temperature	-40°C to +60°C (-40°F to +140°F)
Wind Survival	160 km/h
Weight	0.34 Kg / 0.75 lbs - single unit
	0.52 Kg / 1.14 lbs - single unit incl. package
	11.2 Kg / 24.7 lbs - carton (20 units)
Single Unit	Retail Box: 20.4 × 13.7 × 10.2 cm
Frequency Range	5180 - 6400 MHz
Polarization	Dual Linear H + V

VSWR Max	1.8
Impedance	50 Ohm
COMPATIBLE WIRELESS PLATFORMS	
RF elements®	any TwistPort™ Antenna
Ubiquiti Networks®	LTU™ Rocket, Rocket® Prism 5AC, Rocket® Prism 5AC Gen2,
	airFiber® 5X, airFiber® 5X-HD

[www.citraweb.com](http://www.citraweb.com)

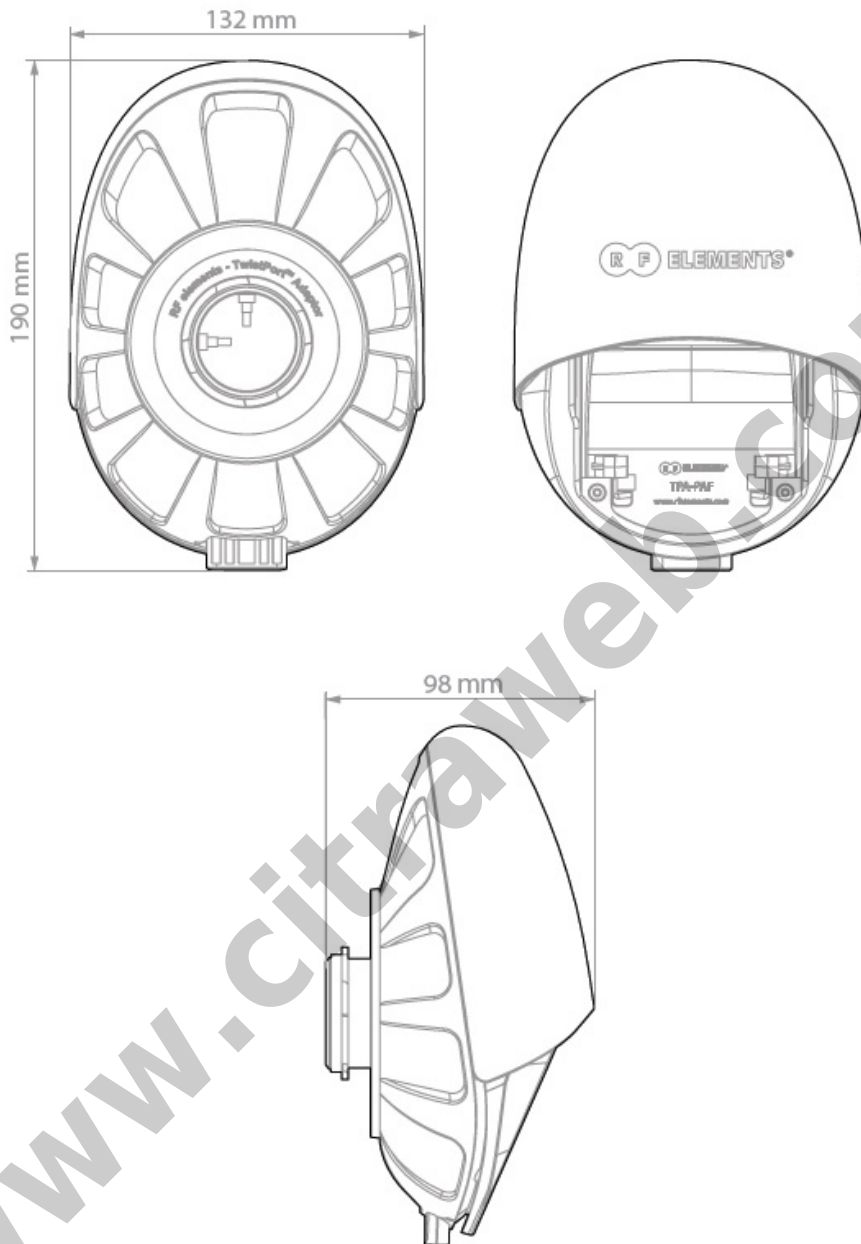

[Download DataSheet](#)

[Download UsersGuide](#)

[www.citraweb.com](http://www.citraweb.com)

*\* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat*

**URL :** <https://www.citraweb.com/produk/881/>

**Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email [sales@citraweb.com](mailto:sales@citraweb.com)**