

# FD514GS3-R850

## 4GE+2WIFI6(AX3000) XPON ONU



High Speed CPU



Low Power Consumption



Software Customization




Optional Shell Supply

### Brief Views

FD514GS3-R850 is WiFi6 xPON Gateway ONT, it support 802.11a/b/g/n/ac/ax standards over 2.4GHz and 5GHz, max speed can up to 3000Mbps.



FD514GS3-R850 have a high reliability and provide quality of service guarantee, easy management, flexible expansion and networking. It fully meets the ITU-T and IEEE technical standards and have good compatibility with third party OLT.

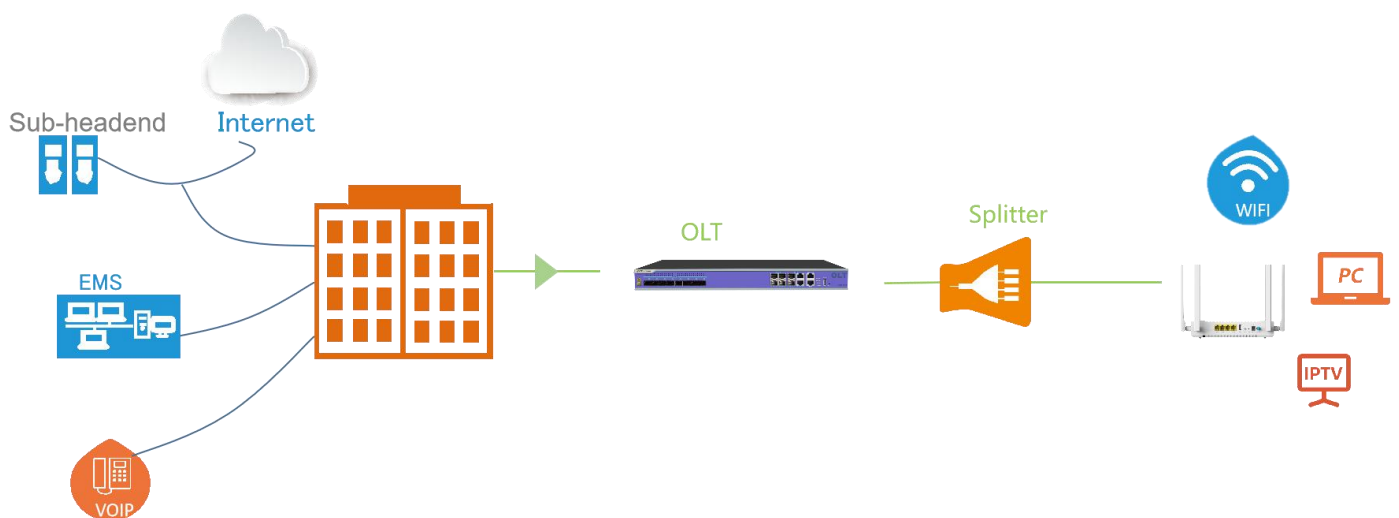

## Functional Feature

- In compliant with IEEE802.3ah and ITU - T G.984 standard
- Support ONU auto-discovery/Link detection/remote upgrade of software
- Support SN and LOID+Password multiple registration methods
- Support port VLAN configuration
- Support port-based rate limitation and bandwidth control
- Support MAC address learning
- Support MAC address learning account limit
- Support VLAN transparent/tag/translate/trunk
- Support broadcasting storm resistance function
- Support igmp transparent/snooping/proxy mode
- Support Dynamic Bandwidth Allocation (DBA)
- Support AES encryption and decryption
- EMS network management based on SNMP ,convenient for maintenance
- Support power-off alarm function ,easy for link problem detection
- Support Firewall
- Support MAC address/URL filter
- Support Remote WEB/Telnet access control

## Product Interface and LED

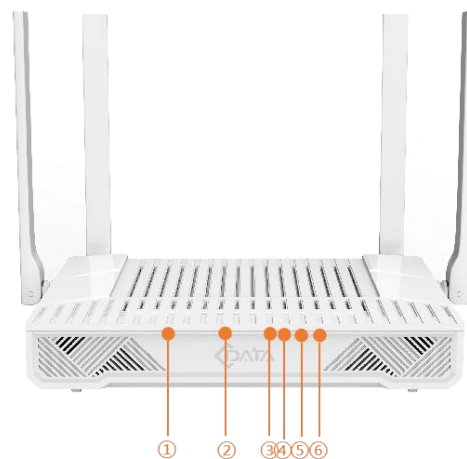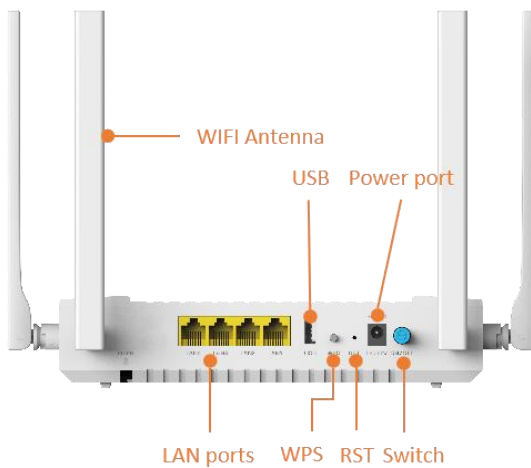

## LED Definitions

| Indicator |                           | Description  |
|-----------|---------------------------|--|
| PWR       | Power status              | On: The ONT is power on;<br>Off: The ONT is Power off;   |
| PON       | ONT Register              | On: Success to register to OLT;<br>Blinking: In process of registering to OLT;<br>Off:Failed to register to OLT or no normal optical signal input; |
| LOS       | PON optical signals       | On: Optical power lower than receiver sensitivity;<br>Off: Optical in normal;  |
| LAN1-4    | LAN port status           | On: Ethernet connection is normal;<br>Blinking: Data is being transmitted through the Ethernet port;<br>Off: Ethernet connection is not set up;    |
| INT       | Internet status indicator | On: The routed WAN Internet access service is normal.<br>Off: The routed WAN Internet access service is abnormal.                                  |
| WIFI      | WIFI                      | Blinking:Data is being transmitted<br>On:WIFI function Opens   |

## Product Specification

### Mechanics

|            |                  |
|------------|------------------|
| Dimensions | 210mm*135mm*45mm |
| Weight     | About 228g       |

### Hardware

|                 |   |   |
|-----------------|---|---|
| User Port (LAN) | RJ-45 connector                           |   |
|                 | 4* 10/100/1000Mbps adaptive Ethernet port |   |
|                 | Full/half duplex                          |   |
|                 | Auto MDI/MDI-X                            |   |
| Indicators      |   | PWR / PON / LOS / LAN1-4 / INT / WIFI   |
| PON Port        | PON Mode                                  | EPON: 1000BASE-PX20+ symmetric<br>GPON: FSAN G.984.2 standard,Class B+              |
|                 | PON Rate                                  | EPON: 1.25Gbps downstream/upstream<br>GPON: 2.488Gbps/1.244Gbps downstream/upstream |
|                 | Wavelength                                | Transmit: 1310nm      Receiver: 1490nm  |
|                 | Receiving sensitivity                     | EPON: -27dBm      GPON: -28dBm  |
|                 | Saturated power                           | EPON: -3dBm      GPON: -8dBm  |
|                 | Transmitting power                        | EPON:0~4dBm      GPON: 0.5~5dBm   |

### WIFI

|  |  |
|--|--|
| IEEE802.11b/g/n/ax(2.4G) / IEEE802.11a/n/ac/ax(5G) |  |
| 2.4G: 40Mhz bandwidth maximum rate 574Mbps         |  |
| 5G: 160Mhz bandwidth maximum rate 2402Mbps         |  |
| Total wireless rate is 3000Mbps                    |  |
| 2.4G EIRP:22dBm / 5 G EIRP:21dBm                   |  |

## Environment

|                     |                            |
|---------------------|----------------------------|
| Working temperature | 0 to 40° C                 |
| Operating humidity  | 10% ~ 90% (Non-condensing) |

## Power

|  |      |
|--|------|
| External 12VDC/1.5A power supply adapter |      |
| Power consumption                        | <18W |

**Copyright © Shenzhen C-Data Technology Co., Ltd. 2023. All rights reserved.**

Without the prior written consent of C-DATA, any reproduction, excerpting, backup, modification, translation or any other form of commercial use of this document or any portion of this document, and in any form or by any means, to transmit the document are prohibited.