

Pro 8 PoE UNIFI UBIQUITI 8-Port POE++ Switch with SFP+ Uplink

Kode : USW-Pro-8-PoE

Brand : Ubiquiti

Jenis : Switch Managed POE

Harga : Rp 5.450.000,00




USW-Pro-8-PoE UniFi 8 port GbE Layer 3 switch with PoE+ and PoE++ output.

Produk ini merupakan produk Fix Price. Pembelian produk tidak dapat menggunakan diskon apapun.

Penawaran Harga Spesial

 **08112039555**

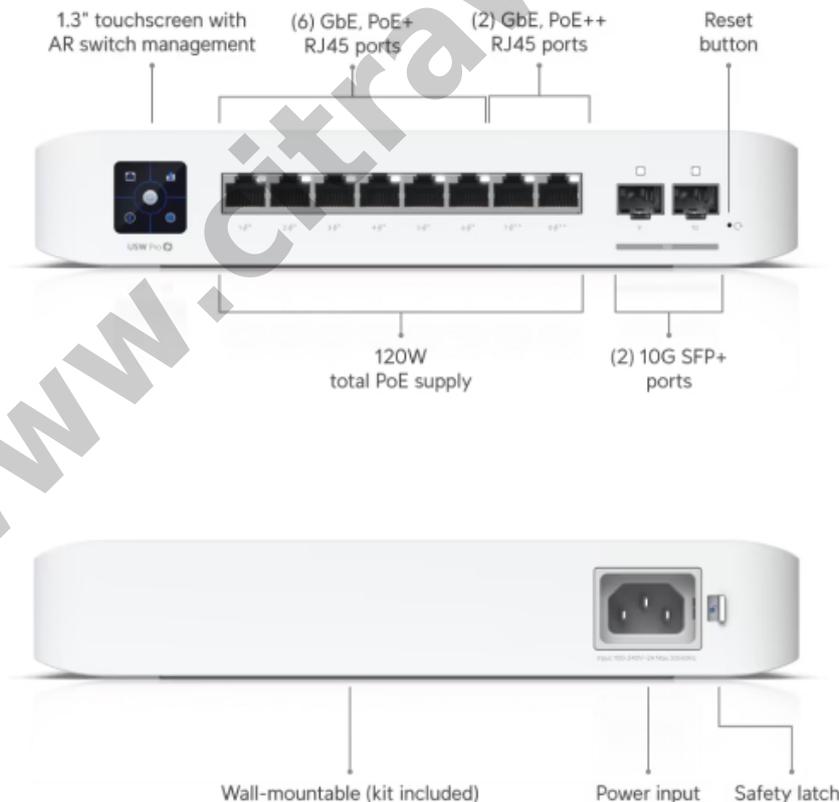

Specification

| | |
|--------------|---------------|
| Model | USW-Pro-8-PoE |
|--------------|---------------|

| | |
|--|---|
| Ports | 1 GbE RJ45 : 8 (6 PoE+; 2 PoE++) 10G SFP+ : 2 |
| Total PoE Availability | 120W |
| Max. PoE Wattage per Port by PSE | PoE : 15.4W PoE+ : 32W PoE++ : 64W |
| Layer Type | Layer 3 |
| Switching capacity | 56 Gbps |
| Total Non-Blocking Throughput | 28 Gbps |
| Forwarding rate | 42 Mpps |
| Supported VLANs | 1000 |
| MAC address table | 16000 |
| L3 Table Size | ARP Entries : 6,000 IPv4 Routes : 512 |
| Packet Buffer Size | 1.5 MB |
| Dimensions (W x D x H) | 200 x 248 x 44 mm |
| Max. Power Consumption | 30W (Excluding PoE Output) 150W (Including PoE Output) |
| Power Method | Universal input, 100–240V AC, 50/60 Hz |
| Power Input Method | AC input |
| Power Supply | AC/DC, internal, 150W |
| Supported Voltage Range | 100–240V AC |
| Management | Ethernet AR |
| Heat Dissipation (Excluding PoE Output) | 102.36 BTU/hr |
| Enclosure Material | Polycarbonate |
| Supported Rack Depth | 400~1200 mm (15.7-47.2") |
| LCM Display | 1.3" touchscreen |
| Ambient Operating Temperature | -5 to 45 C (23 to 113 F) |
| Ambient Operating Humidity | 10 to 90% noncondensing |
| Certifications | CE, FCC, IC |

[Download Datasheet](#)

* Harga, spesifikasi, dan ketersediaan bisa berubah dan tidak mengikat

URL : <https://www.citraweb.com/produk/1327/>

Informasi lebih lanjut, pemesanan dan pembelian, hubungi: 0274-554444 atau email sales@citraweb.com

www.citraweb.com